


HSE ROHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		





Specifications

- 1.Current Rating:2.0Amps
- 2.Insulation Resistance:1000 MΩ min.
- 3.Dielectric withstanding Voltage: 500V AC/DC
- 4.Contact Resistance:20 mΩ max.
- 5.Operating Temperature:−40℃ to+105℃
- 6.Contact Material: Brass
- 7.Insulation Material:Asfollows,UL94V−0,Black
- 8.Plated: Au Over Ni

Ordering Information

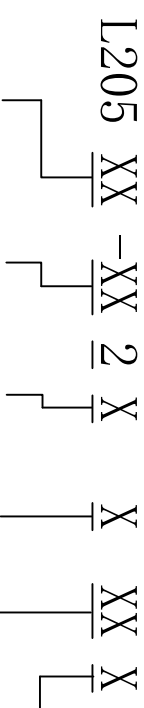

Insulation Height*Wide	NO. of Pins Per Row:	Insulation Material	Contact Plating	Serial NO.	Packing
(H*W)	1-50P	Option:	0=0.8" Gold	01-69	A=PE Bag
		1=1.0*2.0	1=Au1" Gold		B=Tube
		10=1.0*2.0	2=Au1.5" Gold		C=Tray
		15=1.5*2.3	3=Au2" Gold		D=Reel
		20=2.0*2.0	3=NV6T		
			4=LCP		
			5=NV66		
			4=Au3" Gold		
			5=Au5" Gold		
			6=Customized		
			7=Gold/Tin		
			8=NY9T		

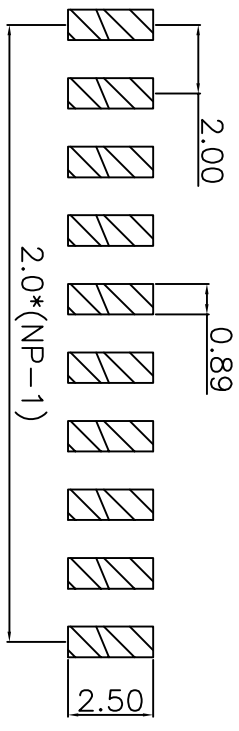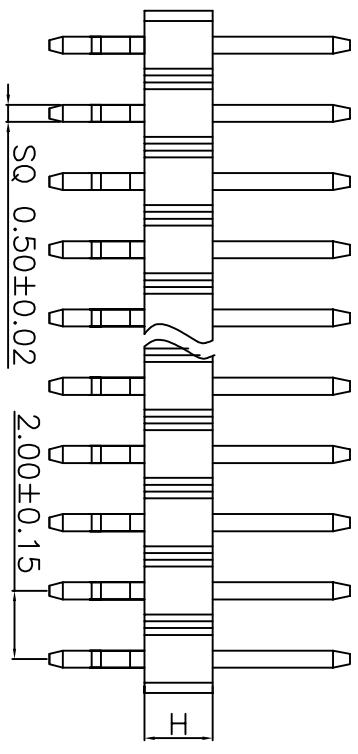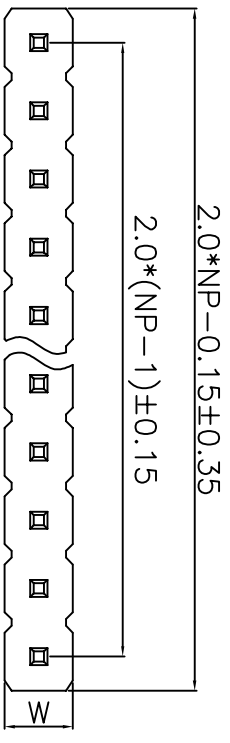

PCB LAYOUT

Dimension antitheses list				
ITEM	PC	PA	H	Pin Length
Standard	2.80	4.00	2.00	9.00
Alternate				

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

LDCONN 东莞连大精密制品有限公司 Dongguan Lianda Precision Products Co., LTD				
TITLE	PH2.00mm Pin Header Single Row 90° SMT	DRAWN BY	YTT	16.02.03
PART NO	L20520-XX2XXXXC	CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNITE	mm	PAGE
				1/1
				SIZE
				A4