

HSF RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

Note:




1. Material

- 1.1: Housing: NY66, Color: Nature
- 1.2: Contact: Brass, Tin.



2. Rating:

- 2.1: Operating Voltage: 250V AC/DC.
- 2.2: Current Rating: 3A AC/DC.
- 2.3: Operating Temperature: -25°C~+85°C.
- 2.4: Contact Resistance: 30 mΩ max.
- 2.5: Insulation Resistance: 1000 MΩ min.
- 2.6: Dielectric withstanding Voltage: AC 500V
- 2.7: Applicable Wire: AWG#24~#30

3. Pater Number:

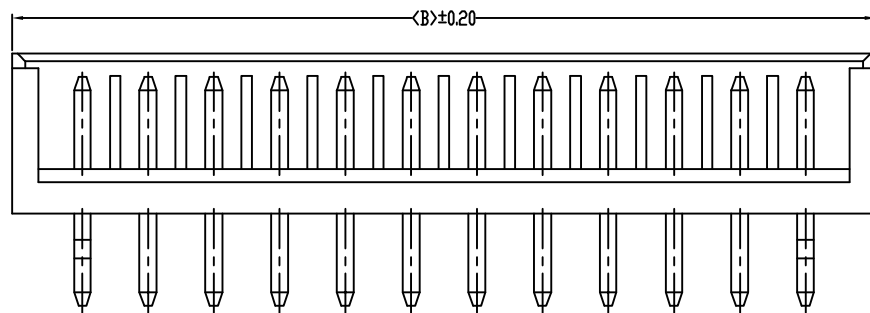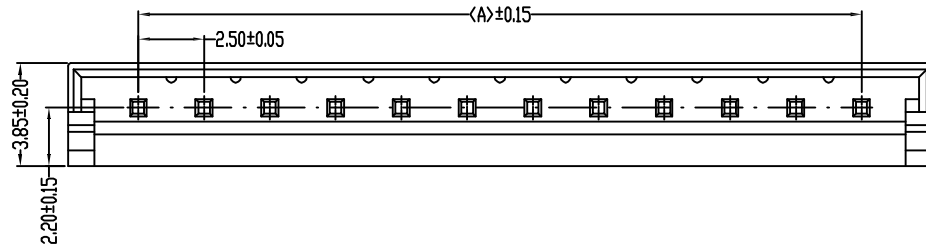

Ordering Information

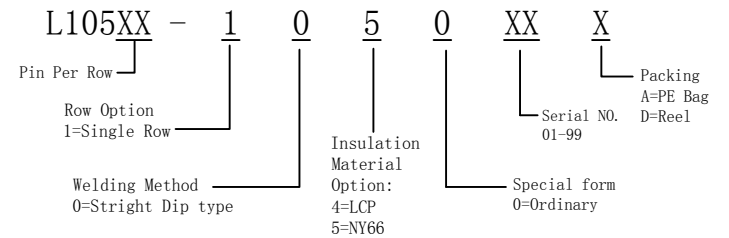

P. C. B LYAOUT

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

LDCONN 东莞连大精密制品有限公司 DongGuan LianDa Precision Products Co., LTD									
TITLE		PH2.5mm Wafer Single row, Stright Dip type, Width3.85mm		DRAWN BY		WZG		17.03.30	
PART NO		L105XX-1050XXX		CHECKED BY					
DRAWING NO				APPROVED BY					
SCALE	1:1	UNIT	mm	⊗	PAGE	1/1	SIZE	A4	