



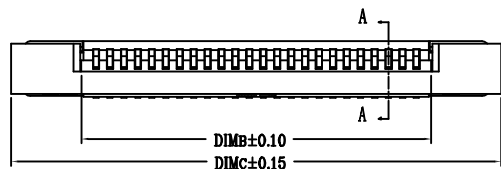
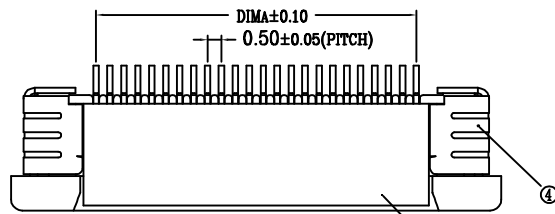


HSF RoHS


REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

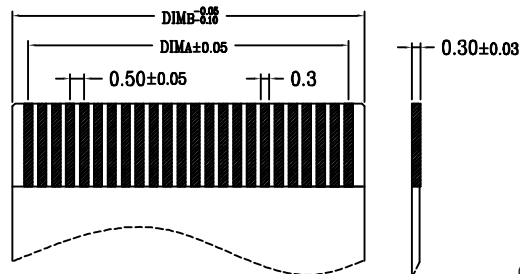

SECTION A-A

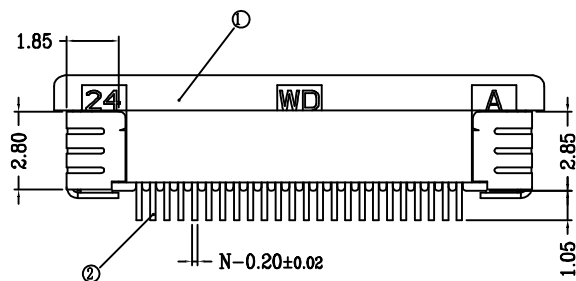

适用扁平线

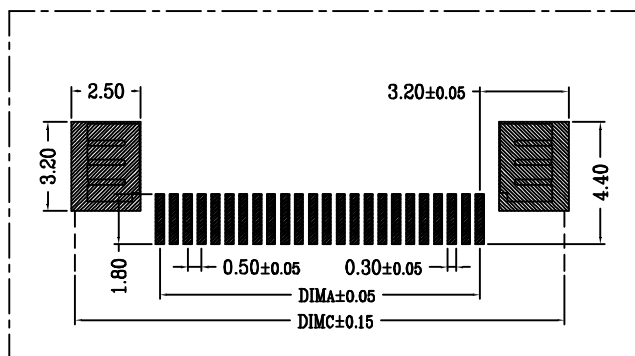

Note:

1.Material

- 1.1: Housing: LCP UL94-V0 Color:Black.
- 1.2: Actuator: LCP UL94-V0 Color:Nature.
- 1.3: Contact: Phosphor Bronze.
- 1.4: LEG: Phosphor Bronze.

2.Plating

- 2.1: Contact: Tin Plating Over Nickel.
- 2.2: LEG: Tin Plating Over Nickel.

3.Rating:

- 3.1: Operating Voltage: 50V AC/DC.
- 3.2: Current Rating: 0.2A AC/DC.
- 3.3: Operating Temperature:-25°C~+85°C.
- 3.4: Contact Resistance:30 mΩ max.
- 3.5: nsulation Resistance:100 MΩ min.
- 3.6: Dielectric withstanding Voltage: AC 250V

4.Pater Number:

TABLE :

N	A	B	C	D
4	1.50	2.60	7.70	
5	2.00	3.10	8.20	
6	2.50	3.60	8.70	
7	3.00	4.10	9.20	
8	3.50	4.60	9.70	
9	4.00	5.10	10.20	
10	4.50	5.60	10.70	
11	5.00	6.10	11.20	
12	5.50	6.60	11.70	
13	6.00	7.10	12.20	
14	6.50	7.60	12.70	
15	7.00	8.10	13.20	
16	7.50	8.60	13.70	
17	8.00	9.10	14.20	
18	8.50	9.60	14.70	
19	9.00	10.10	15.20	
20	9.50	10.60	15.70	
21	10.00	11.10	16.20	
22	10.50	11.60	16.70	
23	11.00	12.10	17.20	
24	11.50	12.60	17.70	
25	12.00	13.10	18.20	
26	12.50	13.60	18.70	
27	13.00	14.10	19.20	
28	13.50	14.60	19.70	
29	14.00	15.10	20.20	
30	14.50	15.60	20.70	
31	15.00	16.10	21.20	
32	15.50	16.60	21.70	
33	16.00	17.10	22.20	
34	16.50	17.60	22.70	
35	17.00	18.10	23.20	
36	17.50	18.60	23.70	
37	18.00	19.10	24.20	
38	18.50	19.60	24.70	
39	19.00	20.10	25.20	
40	19.50	20.60	25.70	
41	20.00	21.10	26.20	
42	20.50	21.60	26.70	
43	21.00	22.10	27.20	
44	21.50	22.60	27.70	
45	22.00	23.10	28.20	
46	22.50	23.60	28.70	
47	23.00	24.10	29.20	
48	23.50	24.60	29.70	
49	24.00	25.10	30.20	
50	24.50	25.60	30.70	
51	25.00	26.10	31.20	
52	25.50	26.60	31.70	
53	26.00	27.10	32.20	
54	26.50	27.60	32.70	
55	27.00	28.10	33.20	
56	27.50	28.60	33.70	
57	28.00	29.10	34.20	
58	28.50	29.60	34.70	
59	29.00	30.10	35.20	
60	29.50	30.60	35.70	

Ordering Information

L501XX-0

PIN

Contact Type
0=Up contact

1

1=SMT

3

Insulation Height
3=2.0mm

XX

Serial NO.
01-99

X

Packing
B=Tube
D=Reel

LDCONN 东莞连大精密制品有限公司

连大

DongGuan LianDa Precision Products Co., LTD

STANDARD TOLERANCE
(EXCEPT SPECIFIED)

LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

TITLE	PH0.5mm FPC Horizontal SMT up contact type with lock	DRAWN BY	WZG	17.03.30
PART NO	L501XX-013XXX	CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNITE	mm	⊙
PAGE	1/1	SIZE	A4	