


HSF RoHS





REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

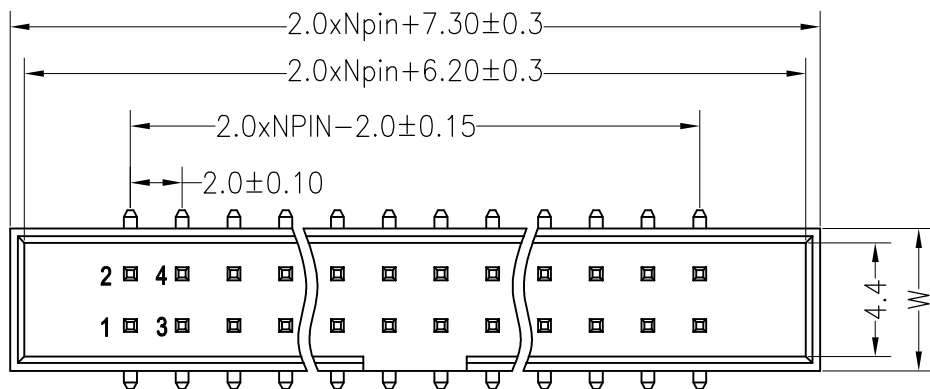

Specifications

- 1.Current Rating:2.0Amps
- 2.Insulation Resistance:1000 MΩ min.
- 3.Dielectric withstanding Voltage: 500V AC/DC
- 4.Contact Resistance:20 mΩ max.
- 5.Operating Temperature:-40℃ to+105℃
- 6.Contact Material: Brass
- 7.Insulation Material:Asfollows,UL94V-0,Black
- 8.Plated: Au Over Ni

Ordering Information

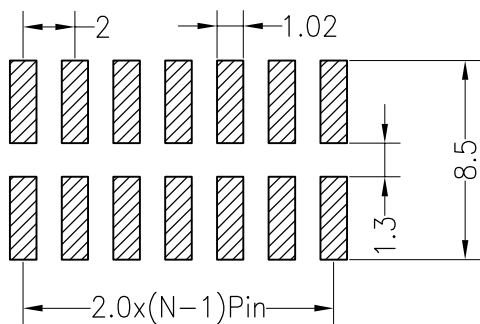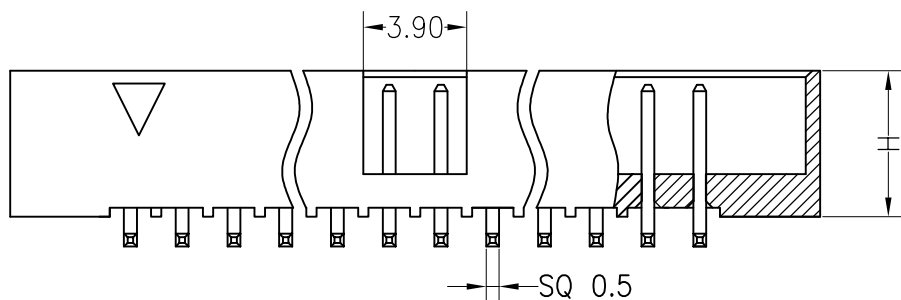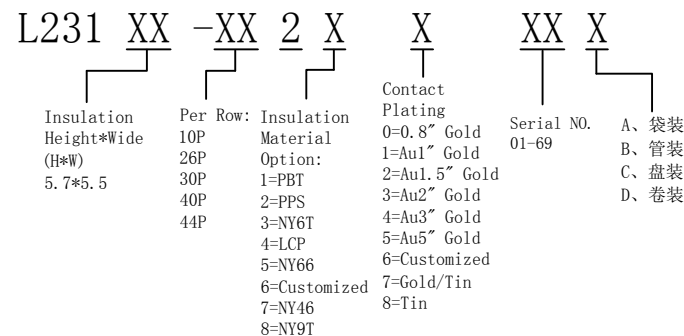

P.C.B Layout

Dimension antitheses list				
ITEM	PC	PB	H	Pin Length
Standard	7.50	6.80	5.7	840
Alternate				

LDCONN 东莞连大精密制品有限公司
DongGuan LianDa Precision Products Co., LTD

STANDARD TOLERANCE (EXCEPT SPECIFIED)		TITLE		PH2.00mm Pin Header Dual Row 90°		DRAWN BY		YTT		16.02.03	
LINER	ANGLES	PART NO		L231XX-XX2XXXXX		CHECKED BY					
.0	±0.30	DRAWING NO				APPROVED BY					
.00	±0.20	SCALE		1:1		UNIT		mm		PAGE	
.000	±0.10	SCALE		1:1		UNIT		mm		PAGE	
	0.°	SCALE		1:1		UNIT		mm		PAGE	
	±3°	SCALE		1:1		UNIT		mm		PAGE	
	±2°	SCALE		1:1		UNIT		mm		PAGE	
	±1°	SCALE		1:1		UNIT		mm		PAGE	