


REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

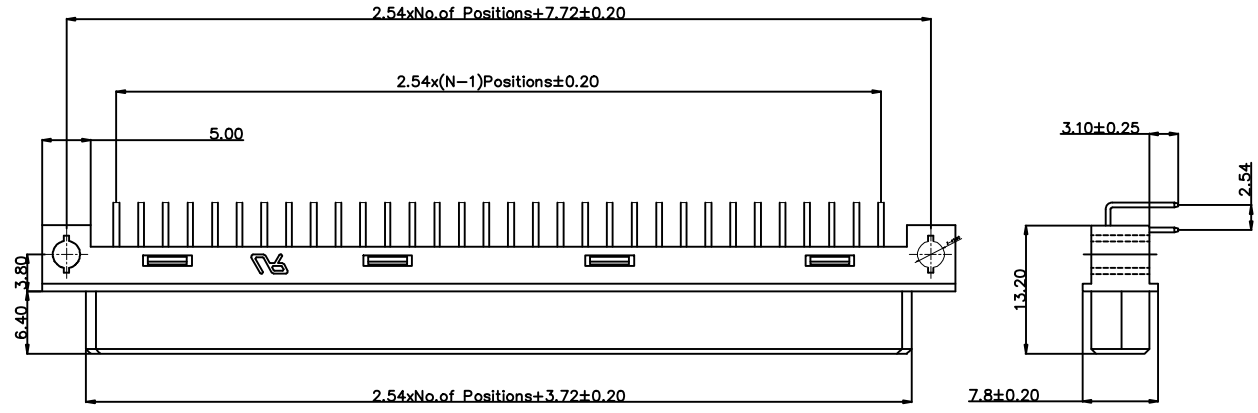

**SPECIFICATIONS**  
 Rated Current: 3.0AMP  
 Contact Resistance: 30mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -55°C to +105°C  
 Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester(UL94V-0)  
 Standard: PBT

**Ordering Information**  
**L496XX - X X XX X**



**NO. of Pins Per Row:**  
 1-50P

**The product type**  
 0、180°  
 1、90°  
 2、SMT  
 9、Welding line

**Contact Plating**  
 0、Au0.8u"  
 1、Au1.0u"  
 7、half gold half tin plating  
 8、Bright tin plating

**Serial NO.**  
 01-99

**Packing**  
 A=PE Bag  
 B=Tube  
 C=Tray  
 D=Reel

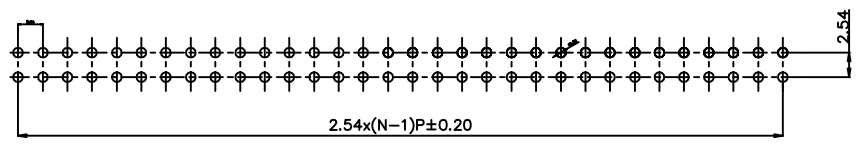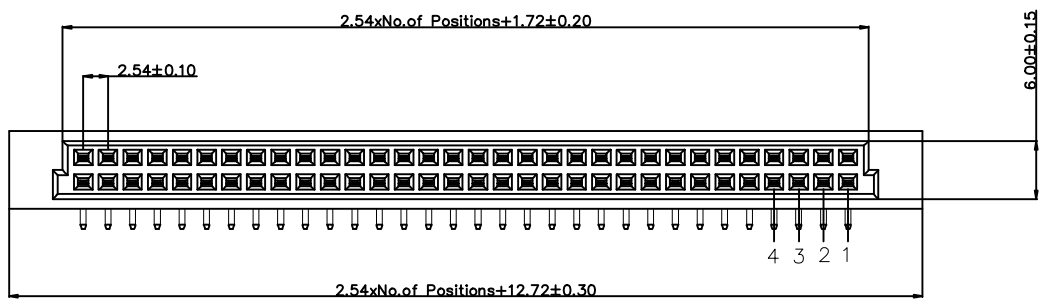

**P.C.B LAYOUT**

STANDARD TOLERANCE (EXCEPT SPECIFIED)			
LINER		ANGLES	
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

**LDCONN 东莞连大精密制品有限公司**  
 连大 DongGuan LianDa Precision Products Co., LTD

TITLE	PH. 54mm-JL DIN 41612 Female Dual-row Right Angle Type	DRAWN BY	Lujunhui	18. 10. 30
PART NO	L496XX-17XXX	CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1 SIZE A4