

HSF ROHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

1. MATERIALS:

Contacts: Phosphor bronze,
Housing: Thermoplastic UL94V-0 BLACK
Shell: Brass.

2. PLATING:

Contact: Au PLATED ON CONTACT AREA,
100u" Sn PLATED ON SOLDER TAIL AREA,
BOTH OVER 50u" Ni UNDER PLATED OVER ALL
Shell: SOLDERABLE Ni OVER ALL

3. SPECIFICATION

DIELECTRIC STRENGTH: AC 500V FOR ONE MINUTE
INSULATION RESISTANCE: 100MΩ min. AT DC 100V
CONTACT RESISTANCE: 45mΩ max.
CURRENT RATING: 500mA
OPERATING TEMPERATURE: -30°C ~ +85°C

Ordering Information


L600XX -X X XX X

insulation height 45=4.5
1=Forward
2=Reverse
Material Option
3=NW6T
4=LCP
Serial NO. 01-99
Packing
C=Tray
D=Reel

3	SHELL	1	Brass	Ni-Plating
2	CONTACT	8	Phosphor bronze	Half the gold tin plating
1	HOUSING	1	LCP	BLACK
NO.	NAME	QTY	MATERIAL	NOTE

LDCONN 东莞连大精密制品有限公司
Dongguan LianDa Precision Products Co., LTD

TITLE	RJ45 8P Sinking board type 90° DIP H4.5	DRAWN BY	LuJunhui	18.04.10
PART NO	L60045-1401C	CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE
				1/1
				SIZE
				A4

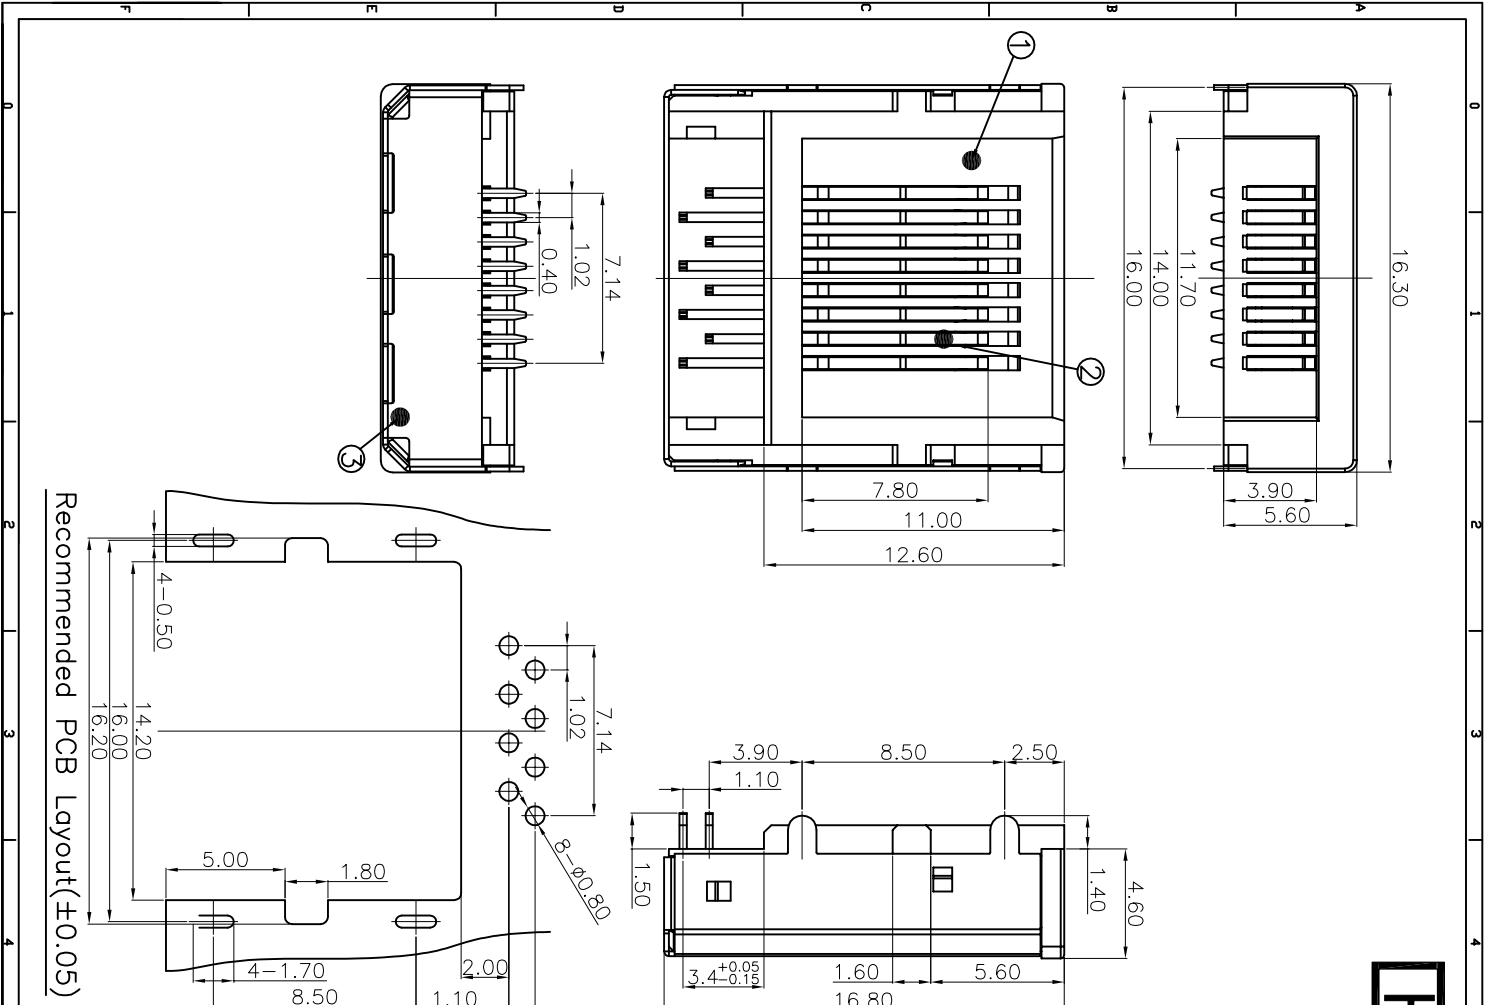

STANDARD TOLERANCE (EXCEPT SPECIFIED)	ANGLES
LINER	0.° ±3°
	0.0 ±0.25 .0° ±2°
	.000 ±0.15 .00° ±1°