
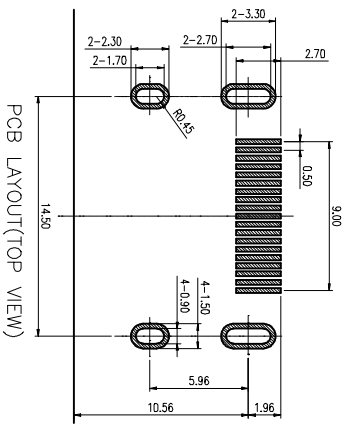



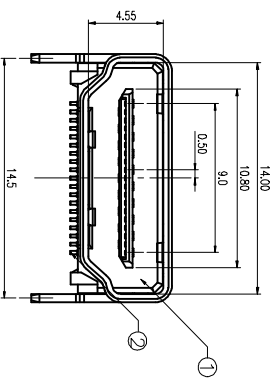


HSE ROHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		




NOTE:
 1. Material:
 Housing: Thermoplastics, UL94V-0; COLOR: BLACK
 Contact: Copper Alloy
 Shell: SPCC

2. FINISH:
 Contact: Au Plated on Contact Area,
 Matte Tin Plated on Solder Tails,
 Nickel Underplating Over All,
 Shell: Nickel Underplating Over All.

3. Specification:
 3.1: Electrical:
 Insulation Resistance(EIA-364-21):
 100M Ω Min. at 500V/DC for 1Minute.
 Contact Resistance(EIA-364-06): 10 m Ω Max.
 Dielectric Withstanding Voltage(EIA-364-20):
 No discharge, flashover or breakdown at 500V/AC 1minute

Ordering Information

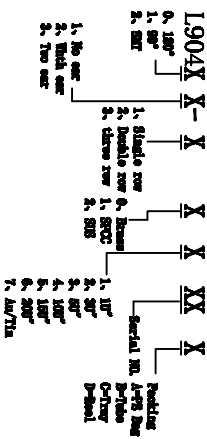

3	SHELL	1	SPCC	PLATED:Cu/Ni
2	CONTACT	19	COPPER ALLOY	PLATED:NI/Au/Matte Tin
1	HOUSING	1	LCP UL94 V-0	BLACK
NO.	ITEM	QTY	MATERIAL	FINISH

LDCONN 东莞连大精密制品有限公司		Dongguan LianDa Precision Products Co., LTD	
TITLE	HMI/A/R-X SMT No exc. with subpanel	DRAWN BY	LuJunhui
PART NO	L90421-11XXXX	CHECKED BY	
DRAWING NO		APPROVED BY	
SCALE	1:1	UNIT	mm
		PAGE	1/1
		SIZE	A4

STANDARD TOLERANCE (EXCEPT SPECIFIED)	ANGLES
LINER	
.0 ±0.30	0.° ±3°
.00 ±0.25	.0° ±2°
.000 ±0.15	.00° ±1°