


**HSF** RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	5/29-'20	HYJ

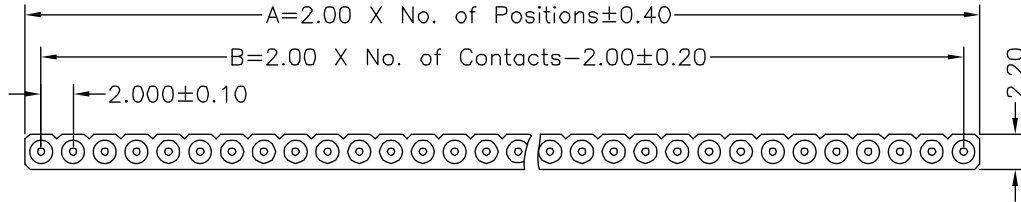

## Technical Data

### Material:

Pin(outer sleeve): Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin plated: 2μm/80μ"Ni, 5μm/200μ"Sn

Gold Plated: 2μm/80μ"Ni, Full gold

Insulator(black): Glass filled thermoplastic polyester  
UL94V-0

### Electrical:

Current rating: 3Amps/contact max.

Contact resistance: £4mW/contact



Insulation resistance: <sup>3</sup> 1000MWat V=100V

Operating voltage: 60VAC/DC

### Mechanical:

Operating temperatures: Gold Plsted: -55°C to+125°C

Tin plated: -40°C to+105°C

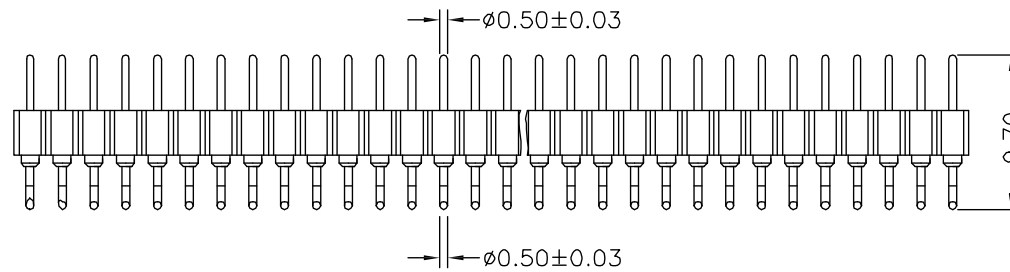

## Ordering Information

L487XX - X X XX A

P数  
XX=XXP

包装类型  
A=袋装

流水号  
01-99

产品类型  
9=特殊

电镀规格  
7=内金外锡

### STANDARD TOLERANCE (EXCEPT SPECIFIED)

LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

<b>LDCONN</b> 连大		<b>东莞连大精密制品有限公司</b> DongGuan LianDa Precision Products Co., LTD			
TITLE	排针圆孔型-J PH2.0X2.8 1XNP 卧贴 PA3.5 PC3.4	DRAWN BY	HRJ	6/17-'20	
PART NO	L487XX-97XXX	CHECKED BY			
DRAWING NO		APPROVED BY			
SCALE	1:1	UNIT	mm	PAGE	1/1
				SIZE	A4